

PowerWalker VI 1200/FR

Line-Interactive UPS System

1200VA Line-Interactive UPS

2x French outlets, RJ11/RJ45 Surge Protection


USB Connection for monitoring

Cold start, built-in boost and buck AVR function

Green power function for energy saving



Item-No. 10120053

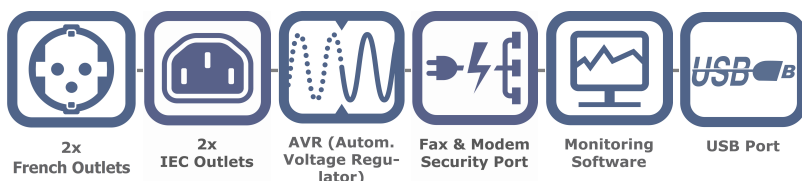

Product Features

PowerWalker VI 1200 is a Line- Interactive UPS which provides high performance and reliable and cost-effective backup power protection. The UPS can be automatically started up without AC power supplied. In addition, this UPS provides RJ11/RJ45 surge protection, and green power function for energy saving. Equipped with a voltage stabilizer, this UPS will continue providing clean and stable power to connected equipment and is perfect for any home or SMB (small medium business) application.


- Super smart charger to shorten charging time
- Built-in boost and buck AVR
- Simulated sine wave
- Auto restart while AC is recovering
- Off-mode charging
- Cold start function
- USB communication port
- RJ11/RJ45 surge protection
- Monitoring software included
- LED Display show UPS status
- Green function for energy saving



Backside view



USB port, RJ11/RJ45 (in/out)

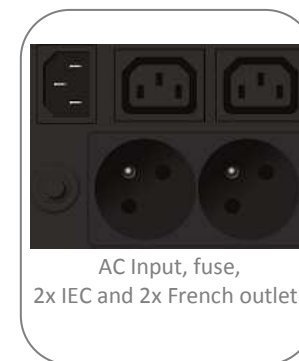

AC Input, fuse,
2x IEC and 2x French outlet

Technical Details

Product Features

| | |
|--|----------------------|
| Capacity | 1200VA/600W |
| Input Voltage | 220/230/240VAC |
| Input Voltage Range | 170-280VAC $\pm 7\%$ |
| Output Voltage | 220/230/240VAC |
| Voltage Regulation (Battery Mode) | $\pm 10\%$ |
| Output Frequency | 50Hz or 60Hz |
| Frequency Regulation (Battery Mode) | $\pm 1\text{Hz}$ |
| Output Waveform | Simulated Sine Wave |

Battery

| | |
|----------------------|-------------------------------------|
| Type | 12V / 7Ah |
| Quantity | 2x |
| Recharge Time | 6h for 90% after complete discharge |

Transfer Time

| | |
|----------------|--------|
| Typical | 4-8 ms |
|----------------|--------|

LED Indicators

| | |
|---------------------|---------------------|
| AC Mode | green LED lighting |
| Battery Mode | yellow LED flashing |

Audio Indicators

| | |
|---------------------|--------------------|
| Battery Mode | Beep every 10 sec |
| Low Battery | Beep every second |
| Fault | Continuous Beep |
| Overload | Beep every 0,5 sec |

Full Protection

| | |
|-----------------------------|-----|
| Discharge prevention | Yes |
| Deep discharger | Yes |
| Overcharge | Yes |
| Overload | Yes |

Connections

| | |
|-------------------------|--------------------|
| Interface | USB |
| Outlets | 2x French, 2x IEC |
| Surge Protection | RJ11/RJ45 (in/out) |

Software & System Requirements

| | |
|-------------------------|--|
| Software | WinPower |
| Operating System | For details visit: www.powerwalker.com/winpower.html |
| Other | 1x USB port |

Product Details

| | |
|-------------------|--------------------|
| Dimensions | 365 x 139 x 195 mm |
| Colour | Black |
| Weight | 8.6 kg |
| Model Code | VI 1200/FR |

Environment

| | |
|--------------------|------------------------------|
| Temperature | 0°C – 40°C |
| Humidity | 0% - 90% RH (non-condensing) |

Package Content

| | |
|------------------------|--|
| Package Content | PowerWalker VI 1200/FR, Input Power cable, IEC cable, USB cable, Software CD, manual |
|------------------------|--|

Logistic Data

| | |
|--------------------------|--|
| Giftbox Language | EN/DE/FR/ES/IT/PT/SV/FI/NO/TR RU/UA/BY/PL/CZ/HR/HU/BG/KK/CS |
| Manual Language | EN/DE/FR |
| Dimension/Giftbox | 452 x 230 x 292 mm |
| Weight/Giftbox | t.b.c. |
| Pieces/Carton | 1 pcs |
| Pieces/Palette | 42 pcs |
| Item Number | 10120053 |
| EAN | 4260074975116 |
| Warranty | 24 Month (except battery) |