

# PowerWalker VI 1500 LCD/FR

Line-Interactive UPS

1500VA Line-Interactive UPS

2x French & 2x IEC outlets, RJ11/RJ45 Surge Protection


USB Connection for monitoring

LCD display for status view

Built-in boost and buck AVR function



Item-No. 10120046

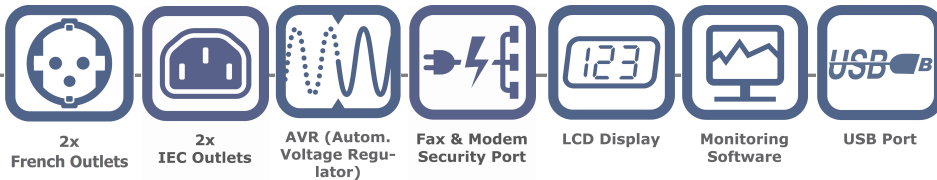

## Product Features

PowerWalker VI 1500 LCD/FR is a Line- Interactive UPS which provides high performance and reliable and cost-effective backup power protection. The UPS can be automatically started up without AC power supplied. In addition, this UPS provides RJ11/RJ45 surge protection, and green power function for energy saving. Equipped with a voltage stabilizer, this UPS will continue providing clean and stable power to connected equipment and is perfect for any home or SMB (small medium business) application.

- Super smart charger to shorten charging time
- Built-in boost and buck AVR
- Simulated sine wave
- Auto restart while AC is recovering
- Off-mode charging
- Cold start function
- USB communication port
- RJ11/RJ45 surge protection
- Monitoring software included
- LCD display for status view
- Green function for energy saving (can be enabled by Software)



Backsite view



LCD Display



RJ11/RJ45 surge protection

## Technical Details

### Product Features

<b>Capacity</b>	1500VA / 900W
-----------------	---------------

### Input

<b>Voltage</b>	220/230/240VAC
----------------	----------------

<b>Voltage Range</b>	160-290VAC
----------------------	------------

### Output

<b>Voltage</b>	220/230/240VAC
----------------	----------------

<b>Voltage Regulation</b>	± 10 % (Battery Mode)
---------------------------	-----------------------

<b>Frequency</b>	50 or 60Hz
------------------	------------

<b>Freq. Regulation</b>	±1 Hz (Battery Mode)
-------------------------	----------------------

<b>Waveform</b>	Modified Sine wave
-----------------	--------------------

### Transfer Time

<b>Typical</b>	2-6ms
----------------	-------

### Battery

<b>Type</b>	12V / 9Ah
-------------	-----------

<b>Quantity</b>	2 x
-----------------	-----

<b>Recharge Time</b>	4h to 90%
----------------------	-----------

### Full Protection

<b>Discharge</b>	Yes
------------------	-----

<b>Overcharge</b>	Yes
-------------------	-----

<b>Overload</b>	Yes
-----------------	-----

### LCD Display

<b>LCD Indicators</b>	AC mode, Battery mode, Load level, Battery capacity, Input voltage, Output voltage, Overload alarm, Fault alarm and Low battery alarm.
-----------------------	--

### Audio Indicators

<b>Battery Mode</b>	Beep every 10sec
---------------------	------------------

<b>Low Battery</b>	Beep every second
--------------------	-------------------

<b>Fault</b>	Beep every 0.5sec
--------------	-------------------

<b>Battery Weak</b>	Beep every 2sec
---------------------	-----------------

<b>Battery faulty</b>	Continuously sounding
-----------------------	-----------------------

### Connections

<b>Communication</b>	USB
----------------------	-----

<b>Outlets</b>	2x French and 2x IEC
----------------	----------------------

<b>Surge Protection</b>	RJ11/RJ45 (in/out)
-------------------------	--------------------

### Software & System Requirements

<b>Software</b>	ViewPower
-----------------	-----------

<b>Operating System</b>	For details visit: <a href="http://www.powerwalker.com/viewpower.html">www.powerwalker.com/viewpower.html</a>
-------------------------	--

<b>Other</b>	1x USB port
--------------	-------------

### Product Details

<b>Dimensions</b>	397 x 146 x 205 mm
-------------------	--------------------

<b>Colour</b>	Black
---------------	-------

<b>Weight UPS case</b>	10.7kg
------------------------	--------

<b>Fan Control</b>	Auto OFF: in LINE mode ON: in battery- and AVR mode
--------------------	---

<b>Noise Level</b>	< 40dB
--------------------	--------

<b>Model Code</b>	VI 1500 LCD/FR
-------------------	----------------

### Environment

<b>Temperature</b>	0°C – 40°C
--------------------	------------

<b>Humidity</b>	0 - 90% (non-condensing)
-----------------	--------------------------

### Package Content

<b>Package Content</b>	PowerWalker VI 1500 LCD/FR, Input Power cable, IEC cable, Software CD, USB cable, manual
------------------------	--

### Logistic Data

<b>Giftbox Language</b>	EN/DE/FR/ES/IT/PT/SV/FI/NO/TR RU/UA/BY/PL/CZ/HR/HU/BG/KK/SR
-------------------------	--

<b>Manual Language</b>	EN/DE/FR/PL/CZ
------------------------	----------------

<b>Dimension/Giftbox</b>	495 x 230 x 290 mm
--------------------------	--------------------

<b>Weight/Giftbox</b>	11.8kg
-----------------------	--------

<b>Pieces/Carton</b>	1
----------------------	---

<b>Pieces/Palette</b>	42
-----------------------	----

<b>Item Number</b>	10120046
--------------------	----------

<b>EAN</b>	4260074975024
------------	---------------

<b>Warranty</b>	24 Month (except battery)
-----------------	---------------------------

Version: EN 30/04/2012

We reserve the right for technical changes and mistakes

Use UPS configurator on [www.powerwalker.com](http://www.powerwalker.com) for detailed backup time information.

PowerWalker is a brand of:

BlueWalker GmbH

Martin-Buber-Strasse 12 • D-41470 Neuss • Germany

Phone: +49 (0) 2137 / 92 98 73 • Fax: +49 (0) 2137 / 78 73 925

info@bluewalker.eu • www.bluewalker.eu • www.powerwalker.com