





# **FR**1500A

Fingerprint reader

FR1500A is a stylish single-gang flush-mounted fingerprint reader designed exclusively for ZKTeco Atlas Bio (x60 Series) panels.

## FR1500A features



# Sleek Stylish Form Factor:

Flush-mounted stainless steel enclosure with slim and attractive design is ideal for both indoor & outdoor installations where aesthetics are very important.



### Communication:

FR1500A connects only via RS485 to Atlas Bio (x60 Series) panels. FR1500A does not support Wiegand.



# Easy Operation:


Once a user places their finger on the FR1500A their fingerprint is subsequently matched by the Atlas Bio (x60 Series) panel. FR1500A also provides Visual indication for acceptance/rejection of the fingeprint (and/or prox card) of the users.




### Standard Reader:


- SilkID fingerprint sensor
- Built-in ZKTeco prox card reader
- Options for HID and Mifare card readers

### **Dimensions**





# Installation with Atlas Bio (x60 Series) panel

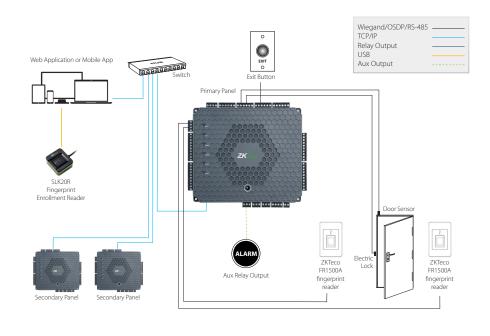

# Specification

#### Communication

RS485 only to Atlasx60 panels

### Power:

12V DC, 1A

#### **Environment:**

Operating Temp: 14° to 113° F (-10° to 45° C) Operating Humidity: 20% to 80%

### **Optional Card Reader:**

Mifare Card, HID 125 kHz card, HID iClass card

#### **Dimensions**

Length: 4.8 inches (121.3 mm)
Width: 3 inches (77.3 mm)
Depth: .3 inches (7.1 mm) exposed
1.5 inches (30.9 mm) behind wall

# Part Numbers

FR1500A: with ZKTeco ID card reader FR1500A-Mifare: with Mifare card reader FR1500A-HID: with HID 125 kHz card reader FR1500A-iClass: with HID iClass card reader

\*\*For single-gang installations be sure to additionally order a ZKTeco single-gang adapter

### **ZKTeco USA**

1600 Union Hills Rd, Alpharetta, NJ 30005 Phone: (862) 505-2101 • Fax: (862) 204-5906 • sales@zktecousa.com • www.zktecousa.com

